



*PROTECTIVE INDUSTRIAL PRODUCTS*

# TOOL TETHERING

FOR DROPPED OBJECTS PREVENTION

[www.pipusa.com](http://www.pipusa.com)

# HOLD GRAVITY ACCOUNTABLE


Working at height is commonplace in a number of industries, from electricians and construction workers to window cleaners and arborists. Workers are ascending to work at heights with the tools and equipment necessary to do the job.

PIP® tool lanyards and other drop prevention accessories meet the ANSI / ISEA 121 standard. They are designed to securely attach to tools to help prevent dangerous drops while providing the user with freedom of mobility and unimpeded functionality of the tool. PIP's tool tethering products are engineered to ensure that a simple slip doesn't result in serious injury to co-workers or bystanders, damage to equipment or tool loss.



## It's a law of physics

Falling objects gain speed as they drop, resulting in a higher force of impact. Factor in the drop height and weight of the object and you'll realize that even something as small as a tape measure can cause serious injury or damage.

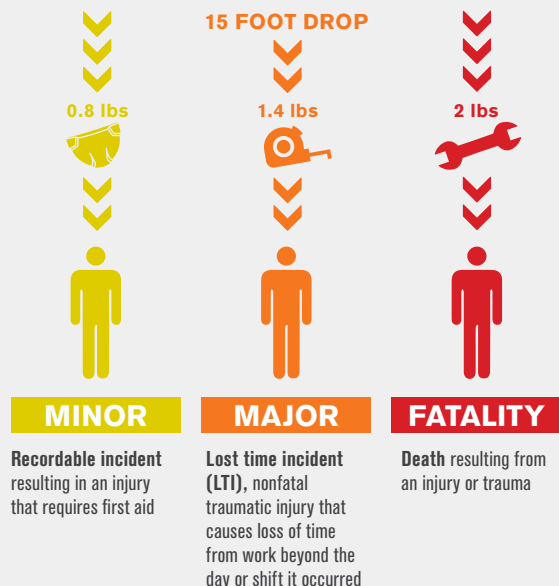

# Tool Lanyards



## Lanyards with barrel-lock carabiner

- Snag-resistant D frame carabiner with angled gate opening includes a lanyard captive pin for extra security
- Shock cording inside nylon protective webbing
- Lock pin on carabiner end for extra security

STYLE NUMBER	MAXIMUM LOAD LIMIT	LEG	CARABINER	GATE OPENING	FASTENER
533-100011	10 lbs / 4.5kg	Single	Barrel-lock	1" / 2.5cm	Draw string
533-100701	22 lbs / 9.9kg	Single	Barrel-lock	1" / 2.5cm	Nylon webbing
533-100012	10 lbs / 4.5kg	Double	Barrel-lock	1.5" / 3.8cm	Draw string
533-900101	Tool Tethering Kit, includes 533-100011, 533-100352, 533-700101				

## The PIP® difference



**Hi-vis protective cover** helps keep tether in view and provides heavy-duty protection against dirt, oil and abrasion.



**Reinforced shock cord** is extra tough, providing superior protection and durability.



Designed for tools with **captive holes** or to be used in conjunction with tool tape for smaller tools.



Powder coated quarter turn **barrel-lock carabiner** with 1" gate opening ensures a secure connection.

# MAKE TOOLS TETHER-READY



## Tool Connector Attachment Points



Maximum Load Limit

**3 lbs.**  
1.4 kg



### WEBBING TOOL CONNECTOR

- Premium nylon webbing
- Fully enclosed D-ring for secure attachment
- Swivel head for ease of use with small tools
- Used with tool tape as retrofit tether point for tools/equipment
- Max load limit 3 lbs / 1.4kg

**533-100352** - 4.5"

**533-100353** - 5.5"



Maximum Load Limit

**2 lbs.**  
0.9 kg



### WIRE SLING LOOP

- Loop end to tether tools with small captive holes
- Premium coated stainless steel cable wire
- Max load limit 2 lbs / 0.9kg

**533-100801**



Maximum Load Limit

**3 lbs.**  
1.4 kg



### WIRE SLING WITH SCREW GATE

- Screw gate end to tether tools with small captive holes
- Premium coated stainless steel cable wire
- Max load limit 3 lbs / 1.4kg

**533-100802**



Maximum Load Limit

**15 lbs.**  
6.8 kg



### TOOL BINDING TAPE

- Premium self-adhering tape
- 12 foot roll
- Used with webbing tool connectors as retrofit tether point for tools/equipment
- Max load limit 15 lbs / 6.8kg

**533-700101**



Maximum Load Limit

**15 lbs.**  
6.8 kg



### ELASTICATED CORD TOOL CONNECTOR

- Provides retrofit attachment point to tools/equipment
- Elastic shock cording with barrel lock to attach to tool/equipment
- Swivel head for ease of use

**533-100151**

Meets ANSI/ISEA 121-2018 dropped object standard

# Accessories



## HARD HAT LANYARD

- High-stretch elastic material
- Easy-to-attach clamp for fabric
- Tethering loop securely connects to hard hat
- Max load limit 2 lbs / 0.9kg

533-300101

Maximum Load Limit  
**2 lbs.**  
0.9 kg



## MEASURING TAPE POUCH

- Premium nylon for strength and durability
- Fully enclosed D-ring for secure attachment
- Used to secure most standard tape measures
- Max load limit 2 lbs / 0.9kg

533-300301

Maximum Load Limit  
**2 lbs.**  
0.9 kg



## WRISTBAND TOOL HOLDER

- Premium nylon and elastic webbing
- Fully enclosed D-ring for secure attachment
- Shock cording for maximum strength & durability
- Swivel head for easy of use with small tools
- Pull-on design for easy on/off application
- One size fits all
- Max load limit 2 lbs / 0.9kg

533-300401

Maximum Load Limit  
**2 lbs.**  
0.9 kg



## UTILITY POUCH

- Premium nylon and elastic webbing
- Fully enclosed D-Ring for secure attachment
- Used to secure radios, cell phones and other small hand tools
- Modular buckle design connects to fall protection and tool belts
- Max load limit 5 lbs / 2.3kg

533-300201

Maximum Load Limit  
**5 lbs.**  
2.3 kg



# SECURE TOOLS & MORE





**PROTECTIVE INDUSTRIAL PRODUCTS, INC.**

968 Albany Shaker Road | Latham, NY 12110

518-861-0133 | 800-262-5755

sales@pipusa.com | www.pipusa.com



616314348952