




# SPECIFICATION SHEET

## 120-4200



### MAXIMUM SAFETY® REINFORCED GOATSKIN LEATHER PALM GLOVE

- Reinforced goatskin leather palm and back provides the softest, most abrasion-resistant leather and is highly recommended for applications requiring tactile sensitivity
- Split goatskin leather fingertips for added protection
- Internal foam padded palm absorbs and dampens shock
- TPR (Thermo Plastic Rubber) molded knuckle guards
- Reflective knuckle tape makes product easy to see in low light
- Nylon spandex fabric for comfort and breathability
- Micro cotton thumb for comfort
- Hook & loop closure for easy on/off and a secure fit
- Sandy PVC thumb crotch and thumb reinforcement
- Retail Ready

### APPLICATIONS

- Construction
- Auto repair
- Demolition
- Manufacturing
- Mining
- Fabrication
- Landscaping

### CARE INSTRUCTIONS

Machine wash in cold water. Do not bleach. Hang dry; tumble dry is not recommended. Do not iron.

### TECHNICAL DATA

MATERIAL	Leather / Spandex / Lycra				
CONSTRUCTION	<b>Back:</b> Unlined spandex fabric (96% nylon, 4% spandex) <b>Palm:</b> Goatskin leather, 0.7 - 0.8 gauge <b>Fingers:</b> Heavy lycra fabric (94% nylon, 6% lycra) <b>Knuckles:</b> Vinyl TPR mold				
COLOR	■ Brown / ■ Black				
CUFF STYLE	Hook and loop wrist closure				
SIZES	S - XXL				
PACKAGING	12 pairs per dozen, 6 dozen per case				
CASE	25.5" x 15.7" x 10" / 64.7cm x 40cm x 25.4cm				
CASE WEIGHT	S	M	L	XL	XXL
	23.1 lb 10.5 kg	24.3 lb 11 kg	26.5 lb 12 kg	28 lb 12.7 kg	28.4 lb 12.9 kg
COO	Pakistan				

### PERFORMANCE PROPERTIES

EN388: 2112						
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

### BARCODES


ITEM	BAG	DOZEN	CASE
■ 120-4200/S	616314069321	01616314069320	02616314069329
■ 120-4200/M	616314069314	01616314069313	02616314069312
■ 120-4200/L	616314069307	01616314069306	02616314069305
■ 120-4200/XL	616314069338	01616314069337	02616314069336
■ 120-4200/XXL	616314069345	01616314069344	02616314069343



### DIMENSIONS (in/cm)

	S	M	L	XL	XXL
<b>A</b>	9 / 22.9	9.4 / 23.9	9.75 / 24.8	10.15 / 25.8	10.35 / 26.3
<b>B</b>	3.75 / 9.5	4 / 10.2	4.25 / 10.8	4.5 / 11.4	4.75 / 12.1

Tolerance (in): +/- 0.125

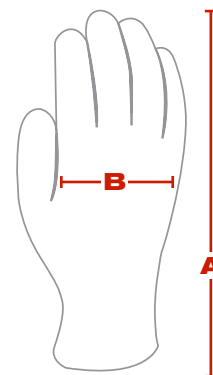

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.