



SPECIFICATION SHEET

382-910

BOSS® PVC STEEL TOE WHITE 16" BOOT

- 100% waterproof protection
- Lightweight Durable/up to 25% lighter than classic PVC boots
- Energy absorbing tread adds all day comfort
- Less toe spring allows for more surface contact for improved channeling of water for better traction/slip resistance and comfort
- Tougher outsole for good abrasion resistance
- Flexible upper material stays supple in cold temperatures to make walking easier
- Pre-formed insole removable wicks perspiration to keep feet dry and comfortable
- Mid-Sole is designed to utilize additional material in the standard area of the shank providing increased support and comfort
- Low profile "kick off" ledge on back of boots
- Meets ASTM F2413-18 M/I/C Impact and Compression
- Made USA
- Prop 65 Compliant

APPLICATIONS

- Construction
- Remediation
- Environmental Clean Up
- Concrete Work
- Food Industry
- Municipal

CARE INSTRUCTIONS

Clean with soapy water if necessary. Do not store in extreme heat or cold.



TECHNICAL DATA


| | | | | | | | | | |
|-------------|--------------------------------------|-------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| MATERIAL | PVC | | | | | | | | |
| COLOR | White / Tan | | | | | | | | |
| SIZES | 6-14 | | | | | | | | |
| TOE | Steel | | | | | | | | |
| PACKAGING | 1 pair per bag, 6 pairs per case | | | | | | | | |
| CASE | 18" x 18" x 13" / 46cm x 46cm x 33cm | | | | | | | | |
| CASE WEIGHT | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| | 25.7 lbs 11.6 kg | 27 lbs 12.2 kg | 27.8 lbs 12.6 kg | 29.1 lbs 13.2 kg | 30.4 lbs 13.8 kg | 32.3 lbs 14.7 kg | 33.5 lbs 15.2 kg | 34.6 lbs 15.7 kg | 36.8 lbs 16.7 kg |
| COO | USA | | | | | | | | |

BARCODES

| ITEM | PAIR | INNER | CASE |
|------------|--------------|----------------|----------------|
| 382-910/6 | 616314391774 | 10616314391771 | 20616314391778 |
| 382-910/7 | 616314391811 | 10616314391818 | 20616314391815 |
| 382-910/8 | 616314391859 | 10616314391856 | 20616314391853 |
| 382-910/9 | 616314391897 | 10616314391894 | 20616314391891 |
| 382-910/10 | 616314391934 | 10616314391931 | 20616314391938 |
| 382-910/11 | 616314391972 | 10616314391979 | 20616314391976 |
| 382-910/12 | 616314392016 | 10616314392013 | 20616314392010 |
| 382-910/13 | 616314392054 | 10616314392051 | 20616314392058 |
| 382-910/14 | 616314392092 | 10616314392099 | 20616314392096 |

DIMENSIONS (in)

| | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|----------|------|------|------|------|------|------|------|------|------|
| A | 10.3 | 10.5 | 10.8 | 11.1 | 11.4 | 11.6 | 12.0 | 12.3 | 12.5 |
| B | 4.0 | 4.0 | 4.3 | 4.3 | 4.3 | 4.4 | 4.5 | 4.5 | 4.5 |
| C | 15.8 | 15.8 | 15.8 | 15.8 | 15.8 | 15.8 | 15.8 | 15.8 | 15.8 |

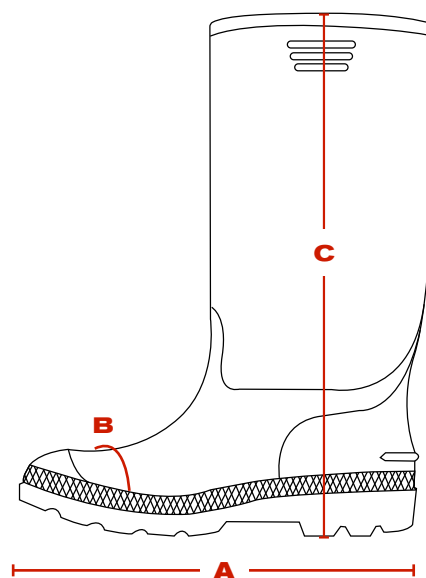

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.