



SPECIFICATION SHEET

MATA500 & MATA500HA



ATA® TECHNOLOGY HIGH PERFORMANCE GLOVES

- High-Performance 7 gauge seamless knit glove
- ANSI A6 cut protection and level 3 abrasion resistance
- Long lasting solution in the toughest applications - users reported gloves lasting 3x longer than gloves replaced
- 3rd Party wash testing shows no diminished performance or appearance after 9 washes
- Style MATA500HA features Hide-Away yarn to hide dirt and grime for prolonged use between washes
- Made in the U.S.A

APPLICATIONS

- Automotive assembly
- Metal fabrication
- Metal stamping
- Steel manufacturing
- Glass manufacturing

CARE INSTRUCTIONS

Machine wash in cold or warm water (do not exceed water temperature of 130° F (55° C)). Line dry or tumble dry with low heat (do not exceed 130° F (55° C) when tumbling). Use of commercial laundry soap is acceptable (DO NOT USE CHLORINE BLEACH).

TECHNICAL DATA

| | |
|--------------|-----------------------|
| MATERIAL | ATA Fiber Technology |
| CONSTRUCTION | 7-Gauge Seamless Knit |
| COLOR | Yellow or Green |
| SIZES | S-2XL |
| PACKAGING | 72 each per case |
| CASE | 20" x 14" x 11" |
| CASE WEIGHT | 8.5 lbs |
| COO | USA |



DIMENSIONS (in/cm)


| | S | M | L | XL | 2XL |
|----------|------|--------|-------|-------|-------|
| A | 9.75 | 10.0 | 10.25 | 10.5 | 10.75 |
| B | 3.75 | 4.0 | 4.25 | 4.5 | 4.75 |
| H | Red | Yellow | Brown | Black | Blue |

PERFORMANCE PROPERTIES

- ASTM F2992-15 - Level A6 Cut Resistance
- ASTM D3884-09 - Level 3 Abrasion Resistance
- MATA500 - ASTM F1060-08 Level 3 (Contact heat 392° F Time to burn at 15.12 seconds)
- MATA500HA - ASTM F1060-08 Level 3 (Contact heat 392° F Time to burn at 15.39 seconds)

BARCODES

| ITEM | PAIR | DOZEN | CASE |
|---------------------|--------------|----------------|----------------|
| Yellow MATA500-S | 616314408861 | 10616314408868 | 20616314408865 |
| Yellow MATA500-M | 616314408885 | 10616314408882 | 20616314408889 |
| Yellow MATA500-L | 616314408908 | 10616314408905 | 20616314408902 |
| Yellow MATA500-XL | 616314408922 | 10616314408929 | 20616314408926 |
| Yellow MATA500-2XL | 616314408946 | 10616314408943 | 20616314408940 |
| Green MATA500HA-S | 616314408960 | 10616314408967 | 20616314408964 |
| Green MATA500HA-M | 616314408984 | 10616314408981 | 20616314408988 |
| Green MATA500HA-L | 616314409004 | 10616314409001 | 20616314409008 |
| Green MATA500HA-XL | 616314409028 | 10616314409025 | 20616314409022 |
| Green MATA500HA-2XL | 616314409042 | 10616314409049 | 20616314409046 |

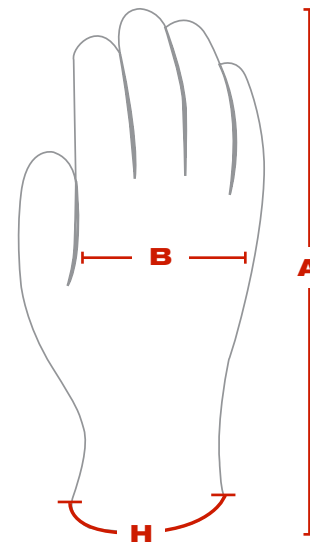

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.