



# SPECIFICATION SHEET

## 09-K1250V



### G-TEK® KNIT KEVLAR® / LYCRA GLOVE WITH POLYURETHANE GRIP

- Kevlar® yarn is designed to be cut resistant, will not melt, ignite, or conduct electricity
- Seamless knit construction protects hands without sacrificing comfort or dexterity
- Polyurethane coated for added abrasion resistance
- Color coded hems for easy size identification
- Dupont Kevlar® brand fiber provides high tensile strength relative to its weight - up to five times stronger than steel

### APPLICATIONS

- Material handling and glass handling
- Fishing Industries
- General maintenance
- Woodworking
- Sanitation, waste handling and recycling

### CARE INSTRUCTIONS

Machine wash in warm water with detergent. Rinse well and spin extract using high speed. Tumble dry on low to medium heat setting. Can be dry cleaned. DO NOT BLEACH.

### TECHNICAL DATA

MATERIAL	Kevlar® / Lycra / Polyurethane				
COLOR	Shell: <span style="color: yellow;">■</span> Yellow / Coating: <span style="color: grey;">■</span> Grey				
CUFF STYLE	Elastic knit				
SIZES	S - XXL				
PACKAGING	1 tri-folded pair per bag; 6 pair per pack; 24 packs per case (144 pair)				
CASE	20" x 11.8" x 15.3" / 51cm x 30cm x 39cm				
CASE WEIGHT (S-XXL)	S	M	L	XL	XXL
	10.5 lbs 4.8 kg	10.8 lbs 4.9 kg	12.2 lbs 5.5 kg	12.3 lbs 5.6 kg	12.5 lbs 5.7 kg
COO	China				



### DIMENSIONS (in/cm)

	S	M	L	XL	XXL
<b>A</b>	8.7 / 22.1	9.1 / 23.1	9.4 / 23.9	9.8 / 24.9	10.2 / 25.9
<b>B</b>	3.5 / 8.9	3.7 / 9.4	3.9 / 9.9	4.1 / 10.4	4.3 / 10.9
<b>H</b>	<span style="color: green;">■</span> Green	<span style="color: white;">□</span> White	<span style="color: brown;">■</span> Brown	<span style="color: red;">■</span> Red	<span style="color: blue;">■</span> Blue


Tolerance (cm): ± 1.0 (A) & ± 0.5 (B)

### PERFORMANCE PROPERTIES

<b>EN388: 4231</b>	ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16) ASTM F1790-05 ANSI Cut Level 2					
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

### BARCODES

ITEM	PAIR	PACK	CASE
<span style="color: yellow;">■</span> 09-K1250V/S	616314209673	01616314209672	02616314209671
<span style="color: yellow;">■</span> 09-K1250V/M	616314209666	01616314209665	02616314209664
<span style="color: yellow;">■</span> 09-K1250V/L	616314209659	01616314209658	02616314209657
<span style="color: yellow;">■</span> 09-K1250V/XL	616314209680	01616314209689	02616314209688
<span style="color: yellow;">■</span> 09-K1250V/XXL	616314209703	01616314209702	02616314209701

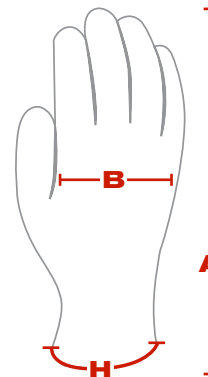

### PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.