



SPECIFICATION SHEET

09-K1450V



G-TEK® KEV™ KEVLAR® / LYCRA GLOVE WITH NITRILE COATED SMOOTH GRIP

- Seamless knit construction provides comfort without sacrificing dexterity
- Kevlar® & Lycra fiber shell provides high tensile strength relative to its weight, is inherently cut resistant and will not melt, ignite or conduct electricity
- Nitrile coated palm and fingertips for excellent dry grip and will not absorb liquids into the coating
- Knit wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Launderable for extended life and to reduce replacement costs

APPLICATIONS

- Material handling and glass handling
- Fishing Industries
- General maintenance
- Woodworking
- Sanitation, waste handling and recycling

CARE INSTRUCTIONS

Machine wash in warm water with detergent. Rinse well and spin extract using high speed. Tumble dry on low to medium heat setting. Can be dry cleaned. DO NOT BLEACH.

TECHNICAL DATA

| | | | | | | |
|-------------|---|--------------------|--------------------|--------------------|--------------------|--------------------|
| MATERIAL | Kevlar® / Nitrile | | | | | |
| COLOR | Shell: ■ Yellow / Coating: ■ Black | | | | | |
| CUFF STYLE | Elastic knit | | | | | |
| SIZES | XS - XXL | | | | | |
| PACKAGING | 1 tri-folded pair per bag; 6 pair per pack; 24 packs per case (144 pair) | | | | | |
| CASE | 15" x 11.4" x 11" / 38cm x 29cm x 28cm | | | | | |
| CASE WEIGHT | XS | S | M | L | XL | XXL |
| | 11.7 lbs 5.3 kg | 12.8 lbs 5.8 kg | 13.9 lbs 6.3 kg | 15.6 lbs 7.1 kg | 17.6 lbs 8.0 kg | 18.9 lbs 8.6 kg |
| COO | Pakistan | | | | | |



DIMENSIONS (in/cm)

| | XS | S | M | L | XL | XXL |
|----------|--|--|--|--|--|--|
| A | 8.3 / 21 | 8.7 / 22 | 9.1 / 23 | 9.4 / 24 | 9.8 / 25 | 10.2 / 26 |
| B | 3.3 / 8.5 | 3.5 / 9.0 | 3.7 / 9.5 | 3.9 / 10.0 | 4.1 / 10.5 | 4.3 / 11 |
| H | ■ Red | □ White | ■ Yellow | ■ Brown | ■ Black | ■ Green |


PERFORMANCE PROPERTIES

EN388: 3221 ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16)
ASTM F1790-05 ANSI Cut Level 2

| | 0 | 1 | 2 | 3 | 4 | - |
|----------|---|---|---|---|---|---|
| ABRASION | 0 | 1 | 2 | 3 | 4 | - |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | - |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | - |

BARCODES

| ITEM | PAIR | PACK | CASE |
|---|--------------|----------------|----------------|
| ■ 09-K1450V/XS | 616314209796 | 01616314209795 | 02616314209794 |
| ■ 09-K1450V/S | 616314209772 | 01616314209771 | 02616314209770 |
| ■ 09-K1450V/M | 616314209765 | 01616314209764 | 02616314209763 |
| ■ 09-K1450V/L | 616314209758 | 01616314209757 | 02616314209756 |
| ■ 09-K1450V/XL | 616314209789 | 01616314209788 | 02616314209787 |
| ■ 09-K1450V/XXL | 616314209802 | 01616314209801 | 02616314209800 |

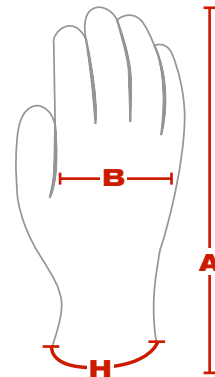

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.