



SPECIFICATION SHEET

302-0211



ANSI TYPE R CLASS 2 AND CAN/CSA Z96 X-BACK BREAKAWAY TWO-TONE MESH VEST

- Breathable polyester mesh
- 5 point breakaway
- 2" two-tone reflective tape for optimum visibility
- Hook and loop closure
- 2 external lower flap pockets
- 1 upper chest/radio pocket and 2 mic tabs
- Available in hi-vis lime yellow and hi-vis orange

APPLICATIONS

- Roadway construction workers
- Survey crews
- Utility workers
- Railway and metro workers
- Emergency response personnel

CARE INSTRUCTIONS

Recommend washing in tempered water not exceeding 104°F or 40°C. Wash in a 5-10 minute cycle time or hand wash. Rinse in cold water. Tumble dry at temperature not exceeding 104°F or 40°C, do not wring. Do not wash in biological powder, wash as synthetics. Maximum of 25 wash cycles.

TECHNICAL DATA

| | |
|--------------|---|
| MATERIAL | 100% Polyester mesh |
| CONSTRUCTION | 120g/m ² polyester mesh, 2" Local TC reflective tape, 1" orange or yellow binding all around, 100% polyester tricot warning tape, 5 breakaway, fastened with hook and loop |
| COLOR | ■ Hi-Vis Yellow ■ Hi-Vis Orange |
| SIZES | S - 5X |
| PACKAGING | 1/Polybag, 50/Case |
| CASE | 19" x 18" x 10" / 48.3cm x 45.7cm x 25.4cm |
| CASE WEIGHT | 32 lbs / 14.5 kg |
| COO | China |




DIMENSIONS (in/cm)

| | S | M | L | XL | 2X | 3X | 4X | 5X |
|----------|--------|----------|----------|--------|----------|----------|---------|----------|
| A | 45/114 | 47.2/120 | 49.6/126 | 52/132 | 54.3/138 | 56.7/144 | 59/150 | 61.4/156 |
| B | 27/69 | 27/68.6 | 28/71 | 28/71 | 29/73.7 | 29/73.7 | 30/76.2 | 30/76.2 |

BARCODES

| ITEM | BAG | DOZEN | CASE |
|------------------|--------------|----------------|----------------|
| ■ 302-0211-LY/S | 616314204807 | 01616314204806 | 02616314204805 |
| ■ 302-0211-LY/M | 616314096433 | 01616314096432 | 02616314096431 |
| ■ 302-0211-LY/L | 616314096105 | 01616314096104 | 02616314096103 |
| ■ 302-0211-LY/XL | 616314096440 | 01616314096449 | 02616314096448 |
| ■ 302-0211-LY/2X | 616314096457 | 01616314096456 | 02616314096455 |
| ■ 302-0211-LY/3X | 616314096464 | 01616314096463 | 02616314096462 |
| ■ 302-0211-LY/4X | 616314096471 | 01616314096470 | 02616314096479 |
| ■ 302-0211-LY/5X | 616314096488 | 01616314096487 | 02616314096486 |
| ■ 302-0211-OR/S | 616314204814 | 01616314204813 | 02616314204812 |
| ■ 302-0211-OR/M | 616314116155 | 01616314116154 | 02616314116153 |
| ■ 302-0211-OR/L | 616314116148 | 01616314116147 | 02616314116146 |
| ■ 302-0211-OR/XL | 616314116162 | 01616314116161 | 02616314116160 |
| ■ 302-0211-OR/2X | 616314116179 | 01616314116178 | 02616314116177 |
| ■ 302-0211-OR/3X | 616314116186 | 01616314116185 | 02616314116184 |
| ■ 302-0211-OR/4X | 616314116193 | 01616314116192 | 02616314116191 |
| ■ 302-0211-OR/5X | 616314116209 | 01616314116208 | 02616314116207 |

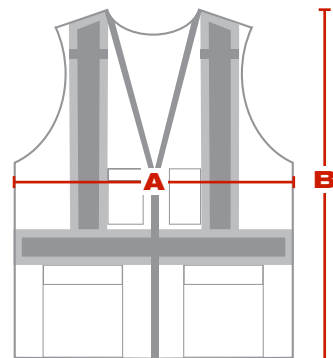

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.