




SPECIFICATION SHEET

302-0600D



ANSI TYPE R CLASS 2 TWO-TONE MESH VEST WITH "D" RING ACCESS

- Breathable polyester mesh
- 2" two-tone tape
- "D" ring harness access on back
- Zipper closure
- 2 lower internal pockets
- 2 mic tabs with reinforced stitching

APPLICATIONS

- Roadway construction workers
- Survey crews
- Utility workers
- Railway & metro workers
- Emergency response personnel

CARE INSTRUCTIONS

Machine wash, 104°F max, 30 cycles. Always wear fastened. The high visibility properties of this garment must be kept clean to be effective. If faded or permanently soiled it must be replaced with a new one.

TECHNICAL DATA

MATERIAL	100% Polyester
CONSTRUCTION	Main Fabric: 120g/m ² 100% polyester mesh with "D" ring safety access, 2 pockets Accessories: 2" Local TC reflective tape, 3/4" 120g/m ² 100% polyester lime yellow/orange tricot warning tape, #5 resin zipper
COLOR	■ Hi-Vis Lime Yellow or ■ Hi-Vis Orange
SIZES	S - 5X
PACKAGING	1 per poly bag, 5 per inner pack, 50 per case
CASE DIMENSIONS	18.9" x 11.81" x 19.29" / 48cm x 30cm x 49cm
CASE WEIGHT	34.2 lbs / 15.5 kg
COO	China




DIMENSIONS (in/cm)

	S	M	L	XL	2X	3X	4X	5X
A	45 / 114	47 / 120	49.5 / 126	52 / 132	54.5 / 138	56.5 / 144	59 / 150	61.5 / 156
B	27 / 69	28 / 71	28 / 71	28 / 71	29 / 73.5	29 / 73.5	30 / 76	30 / 76

BARCODES

ITEM	BAG	INNER PACK	CASE
■ 302-0600D-LY/S	616314204869	01616314204868	02616314204867
■ 302-0600D-LY/M	616314128943	01616314128942	02616314128941
■ 302-0600D-LY/L	616314128936	01616314128935	02616314128934
■ 302-0600D-LY/XL	616314128950	01616314128959	02616314128958
■ 302-0600D-LY/2X	616314128967	01616314128966	02616314128965
■ 302-0600D-LY/3X	616314128974	01616314128973	02616314128972
■ 302-0600D-LY/4X	616314128981	01616314128980	02616314128989
■ 302-0600D-LY/5X	616314128998	01616314128997	02616314128996
■ 302-0600D-OR/S	616314204876	01616314204875	02616314204874
■ 302-0600D-OR/M	616314129018	01616314129017	02616314129016
■ 302-0600D-OR/L	616314129001	01616314129000	02616314129009
■ 302-0600D-OR/XL	616314129025	01616314129024	02616314129023
■ 302-0600D-OR/2X	616314129032	01616314129031	02616314129030
■ 302-0600D-OR/3X	616314129049	01616314129048	02616314129047
■ 302-0600D-OR/4X	616314129056	01616314129055	02616314129054
■ 302-0600D-OR/5X	616314129063	01616314129062	02616314129061

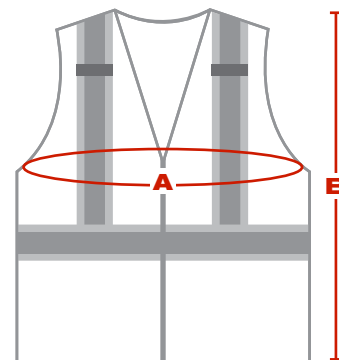

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.