



# SPECIFICATION SHEET

## 9100-2100D



### 8.5 cal/cm<sup>2</sup> DUAL CERTIFIED, VENTED BACK COVERALL

- HRC2, ATPV 8.5 cal/cm<sup>2</sup>
- NFPA 2112-2012
- UL Certified
- Aramid high tenacity FR thread, FR rib knit cuffs
- No metal pieces on the garment
- Bar-tacked at all stress points
- Protective stand-up collar with velcro closure
- Storm guard with hook and loop closure
- Comfort vented back for breathability
- Action back for mobility, side elasticized waist
- Hook and loop closure on bottom
- 2 waist patch pockets with side access

### STANDARDS MET

- NFPA 1975-2009, NFPA 2112-2012
- NFPA 70E 2012, ASTM F 1506-2010a
- CAN/CGSB 155.20-2000, CAN/CGSB 155.22-97
- OSHA 29 CFR1910.269
- EN ISO11611:2008, EN ISO11612:2008, EN ISO14116:2008
- UL Model # STC24

### APPLICATIONS

- Electrical & Utilities
- Petrochemical, Gas & Oil
- Mining
- Welding
- Emergency Services

### CARE INSTRUCTIONS

Machine wash warm, 165° F max. Tumble dry low. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

### TECHNICAL DATA

|              |  |
|--------------|--|
| MATERIAL     | FR twill weave. 90% Cotton/10% Nylon   |
| CONSTRUCTION | <b>Main:</b> 7oz FR twill weave. 90% Cotton/10% Nylon.<br><b>Acc:</b> Yellow FR mesh inside vented back. |
| COLOR        | ■ Khaki (9100-2100D)   |
| SIZES        | S - 5X   |
| PACKAGING    | 1/Polybag, 18/ Case  |
| CASE         | 22" x 16" x 16" / 56cm x 41cm x 41cm   |
| CASE WEIGHT  | 53 lbs / 24 kg   |
| COO          | China  |
| HARM CODE    | 6211.32.0010   |


### BARCODES

| ITEM            | BAG          | BOX | CASE           |
|-----------------|--------------|-----|----------------|
| ■ 9100-2100D/S  | 616314151071 | --- | 02616314151079 |
| ■ 9100-2100D/M  | 616314151088 | --- | 02616314151086 |
| ■ 9100-2100D/L  | 616314151095 | --- | 02616314151093 |
| ■ 9100-2100D/XL | 616314151101 | --- | 02616314151109 |
| ■ 9100-2100D/2X | 616314151118 | --- | 02616314151116 |
| ■ 9100-2100D/3X | 616314151125 | --- | 02616314151123 |
| ■ 9100-2100D/4X | 616314151132 | --- | 02616314151130 |
| ■ 9100-2100D/5X | 616314151149 | --- | 02616314151147 |



### DIMENSIONS (in)

|          | S     | M     | L     | XL    | 2X    | 3X    | 4X    | 5X    |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>A</b> | 36-38 | 40-42 | 44-46 | 48-50 | 52-54 | 56-58 | 60-62 | 64-66 |
| <b>B</b> | 32-34 | 36-38 | 40-42 | 44-46 | 48-50 | 52-54 | 56-58 | 60-62 |
| <b>C</b> | 34.5  | 35.5  | 36.5  | 38    | 39.5  | 41    | 42.5  | 44    |
| <b>D</b> | 32    | 32    | 32    | 32    | 32    | 32    | 32    | 32    |

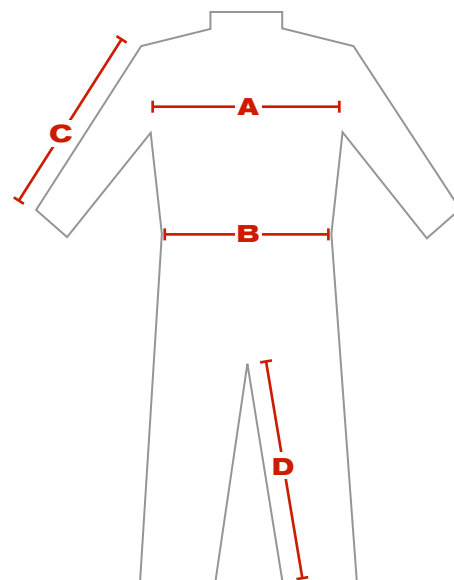

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.