



SPECIFICATION SHEET

9100-2160D



AR/FR DUAL CERTIFIED COVERALL – 8.5 CAL/CM²

- ARC rated: 8.5 cal/cm² ATPV
- NFPA 2112-2012 - UL Certified
- PPE 2
- Aramid high tenacity FR thread
- No metal pieces on the garment
- Bar-tacked at all stress points
- Protective stand-up collar with hook & loop closure
- Storm guard with hook & loop closure
- Action back for mobility
- Side elasticized waist
- FR rib knit cuffs
- Hook & loop on bottom
- 2 waist patch pockets with side access

STANDARDS

- NFPA 1975-2009, NFPA 2112-2012
- NFPA 70E 2012, ASTM F 1506-2010a
- CAN/CGSB 155.20-2000, CAN/CGSB 155.22-97
- OSHA 29 CFR 1910.269
- EN ISO 11611:2008, EN ISO 11612:2008, EN ISO 14116:2008

APPLICATIONS

- Electrical & utilities
- Petrochemical, gas & oil
- Mining
- Welding
- Emergency services

CARE INSTRUCTIONS

Machine wash warm, 165°F max. Tumble dry low. Do not bleach. Do not use fabric softener. Do not iron.

TECHNICAL DATA

MATERIAL	FR Twill Weave / 90% Cotton / 10% Nylon
CONSTRUCTION	7 oz. FR twill weave, 90% cotton, & 10% nylon
COLOR	■ Navy
SIZES	S - 5XL
PACKAGING	1 per polybag, 18 per case
CASE DIMENSIONS	20" x 16" x 17.5" / 51cm x 41cm x 44cm
CASE WEIGHT	51 lbs / 22 kg
COO	China


BARCODES

ITEM	BAG	INNER PACK	CASE
■ 9100-2160D/S	616314132551	---	02616314132559
■ 9100-2160D/M	616314132568	---	02616314132566
■ 9100-2160D/L	616314132575	---	02616314132573
■ 9100-2160D/XL	616314132582	---	02616314132580
■ 9100-2160D/2X	616314132599	---	02616314132597
■ 9100-2160D/3X	616314132605	---	02616314132603
■ 9100-2160D/4X	616314132612	---	02616314132610



DIMENSIONS (in)

	S	M	L	XL	2XL	3XL	4XL	5XL
A	36-38	40-42	44-46	48-50	52-54	56-58	60-62	64-66
B	32-34	36-38	40-42	44-46	48-50	52-54	56-58	60-62
C	34.5	35.5	36.5	38	39.5	41	42.5	44
D	32	32	32	32	32	32	32	32

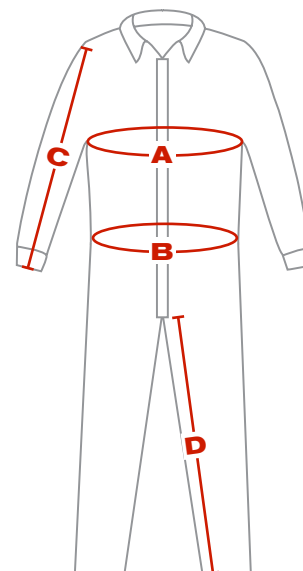

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.