



SPECIFICATION SHEET

9100-52772



25 cal/cm² ARC/FLAME RESISTANT COVERALL

- HRC3, ATPV 26.8 cal/cm²
- Aramid high tenacity thread
- Bartacked at all stress points
- Protective stand up collar
- Storm guard with front hook and loop closure
- Side elasticized waist
- Aramid rib knit cuffs
- 2 waist side access pockets

STANDARDS MET

- NFPA 70E 2012
- ASTM F1506
- OSHA 29 CFR 1910

APPLICATIONS

- Electrical & Utilities
- Petrochemical
- Mining
- Gas
- Oil
- Military
- Welding
- Emergency Services

CARE INSTRUCTIONS


Machine wash warm, 165° F max. Tumble dry low. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

TECHNICAL DATA

MATERIAL	7oz Westex Ultra Soft®, 88% Cotton / 12% Nylon
CONSTRUCTION	Two layers, 7oz over 7 oz
COLOR	■ Navy
SIZES	S - 5X
PACKAGING	10 per case
CASE WEIGHT	2lbs per unit
COO	Mexico

BARCODES

ITEM	EACH	BOX	CASE
■ 9100-52772/S	616314136719	01616314136718	02616314136717
■ 9100-52772/M	616314136702	01616314136701	02616314136700
■ 9100-52772/L	616314136696	01616314136695	02616314136694
■ 9100-52772/XL	616314136726	01616314136725	02616314136724
■ 9100-52772/2X	616314136641	01616314136640	02616314136649
■ 9100-52772/3X	61631413665	01616314136657	02616314136656
■ 9100-52772/4X	616314136665	01616314136664	02616314136663
■ 9100-52772/5X	616314136672	01616314136671	02616314136670
■ 9100-52772/6X	616314136726	01616314136725	02616314136724

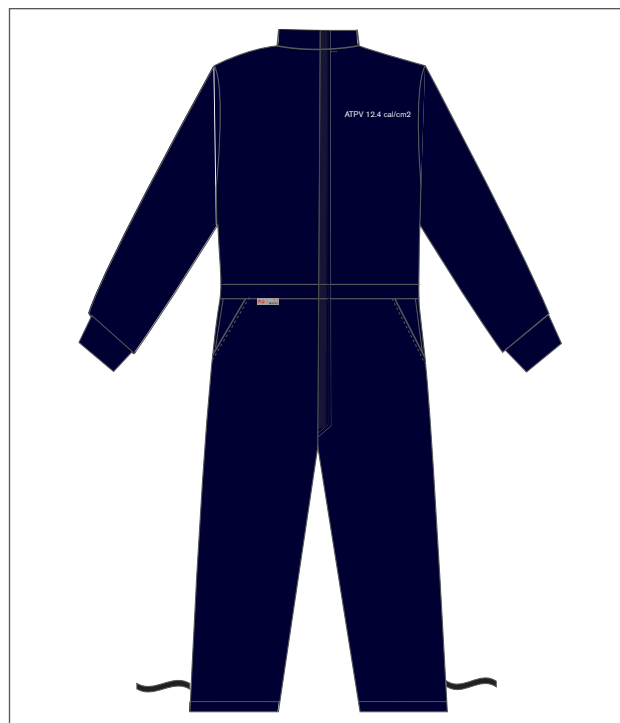

DIMENSIONS (in)

	S	M	L	XL	2X	3X	4X	5X
A	36-38	40-42	44-46	48-50	52-54	56-58	60-62	64-66
B	32-34	36-38	40-42	44-46	48-50	52-54	56-58	60-62
C	34.5	35.5	36.5	38	39.5	41	42.5	44
D	32	32	32	32	32	32	32	32

