



SPECIFICATION SHEET

34-275



MAXIFLEX® ELITE™ ULTRA LIGHT WEIGHT SEAMLESS KNIT NYLON GLOVE WITH NITRILE COATED MICRO-FOAM GRIP ON PALM, FINGERS & KNUCKLES

- 30% thinner than traditional foam nitrile gloves
- Patented micro-foam nitrile coating offers 360° breathability
- Ultra light-weight liner creates smooth and rounded fingertips maximizing sensitivity, dexterity, and tactility
- Minimal penetration (strike through) leaving only the soft liner resting against the skin
- Silicone Free
- CFIA Approved

APPLICATIONS

- Handling small oily parts and components
- General assembly and machining
- Automotive components
- Micro-engineering
- Logistics and warehousing

CARE INSTRUCTIONS

Recommend washing gloves in tempered water not exceeding 104° F or 40°C. A mild commercial laundry soap or detergent should be used. Wash in a 5-10 minute cycle time. Rinse in cold water. Tumble dry at temperature not exceeding 104° F or 40° C.



TECHNICAL DATA

| | | | | |
|-------------|---|--------------------|--------------------|--------------------|
| MATERIAL | Nylon liner; micro-foam nitrile coating | | | |
| COLOR | Shell: ■ Blue / Coating: ■ Blue | | | |
| CUFF STYLE | Continuous Knit | | | |
| SIZES | S-XL | | | |
| PACKAGING | 12 per dozen, 12 dozen per case | | | |
| CASE | 22.0" x 14.2" x 7.9" / 56cm x 36cm x 20cm | | | |
| CASE WEIGHT | S | M | L | XL |
| | 13.9 lbs 6.3 kg | 15.0 lbs 6.8 kg | 16.3 lbs 7.4 kg | 17.6 lbs 8.0 kg |
| COO | Sri Lanka | | | |

DIMENSIONS (in/cm)


| | S | M | L | XL |
|----------|------------|------------|------------|------------|
| A | 8.1 / 20.5 | 8.7 / 22.0 | 8.9 / 22.5 | 9.1 / 23.0 |
| B | 3.5 / 8.8 | 3.5 / 9.0 | 3.9 / 9.8 | 4.0 / 10.2 |
| H | ■ Red | ■ Orange | □ White | ■ Yellow |

PERFORMANCE PROPERTIES

| | | | | | | |
|-------------|---|---|---|---|---|---|
| EN388: 4121 | | | | | | |
| ABRASION | 0 | 1 | 2 | 3 | 4 | 5 |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | 5 |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | 5 |

BARCODES

| ITEM | BAG | DOZEN | CASE |
|-------------|-----|----------------|----------------|
| ■ 34-275/XL | --- | 01616314128188 | 02616314128187 |
| ■ 34-275/L | --- | 01616314128157 | 02616314128156 |
| ■ 34-275/M | --- | 01616314128164 | 02616314128163 |
| ■ 34-275/S | --- | 01616314128171 | 02616314128170 |

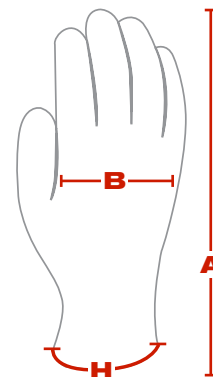

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.